

WATER COOLED CONDENSING UNIT

LBP & MHBP APPLICATIONS



AUTHORIZED REFRIGERANTS

R-134a

R-513A

R-1234yf

R-404A

R-452A

R-448A
R-449A

R-454C

R-455A

R-290

Please refer to Tecumseh's guidelines for using R-452A and R-448A/R449A and to the selection software in order to know energy performances datas.

FEATURES & BENEFITS

HIGH EFFICIENCY

- Low condensing temperature
- Reciprocating, rotary or scroll
- Optimized condenser

EASY TO INSTALL

- Compact
- High level of equipment
- Very quiet

LONG TERM SOLUTION

- Robust
- Low refrigerant charge
- Green refrigerant
- Factory leak test

LARGE COOLING CAPACITY RANGE

- From 300 to 13000W

EQUIPMENT COMPATIBILITY

DRY-COOLER


- Minimizing outdoor units

HEAT RECOVERY SYSTEM

- Energy savings

CHILLER INFINEE

- Low condensing temperature
- High ambient temperature

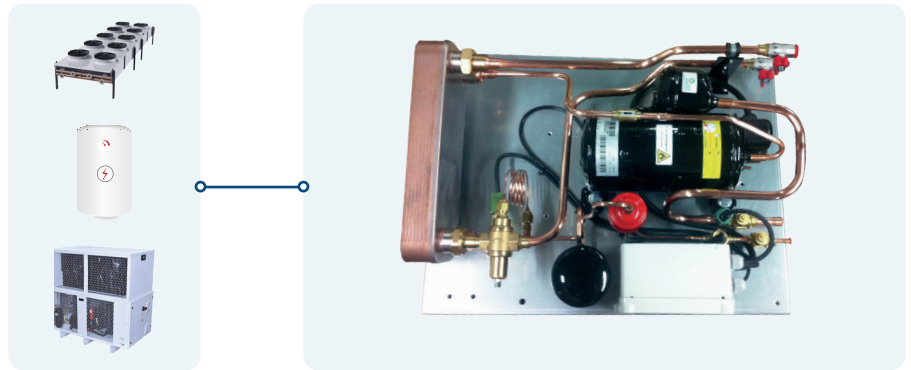

FEATURES

FILTER DRYER, SIGHT GLASS

ELECTRICAL BOX

COMPRESSOR

- Reciprocating
- Rotary
- Scroll


SERVICE VALVES

RECEIVER

CONDENSER WATER VALVE

HEAT PLATE EXCHANGER

PRESSURE SWITCH

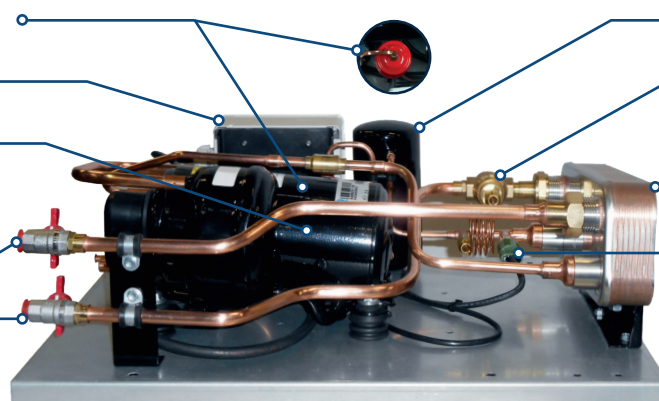

COOLING CAPACITY RANGE



*cond: EN 13215 Water temp. 32°, Evap temp -35°C, RG 20°C, SC 3K

**cond: EN 13215 Water temp. 32°, Evap temp -10°C, RG 20°C, SC 3K



DISCOVER
THE TECUMSEH
PRODUCT RANGE
[TECUMSEH.COM](https://tecumseh.com)

